

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ANSMANN

**Supplier's address:** Compliance, Industriestr. 10, 97959 Assamstadt, DE

**Model identifier:** FL20W-AC

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	CEE 7/7 / H05RN-F; 3x 1,0mm <sup>2</sup> ; 1,8 m		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 900 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	20,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	222	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	146	
	Depth	228	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,380 0,380
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	800	Beam angle in degrees, or the range of beam angles that can be set	110
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	3	Survival factor	0,90
the lumen maintenance factor	0,97		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;

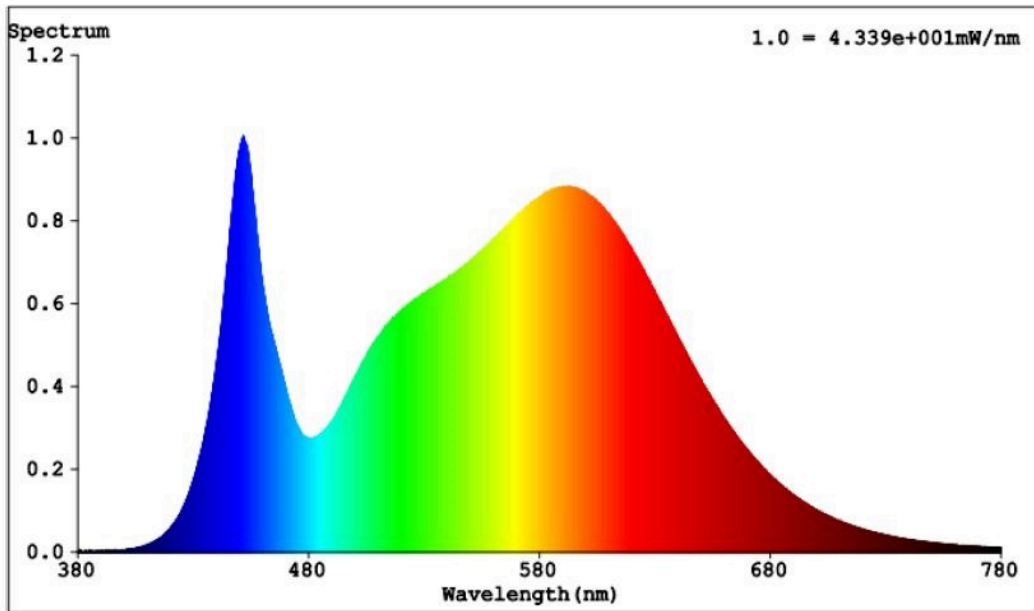

Model placed on the Union market from 01/08/2024.



**EPREL registration number:** 1930620

<https://eprel.ec.europa.eu/qr/1930620>

**Supplier:** Ansmann AG (Manufacturer)

**Website:** [www.ansmann.de](http://www.ansmann.de)

**Customer care service:**

**Name:** Compliance

**Website:** [www.ansmann.de](http://www.ansmann.de)

**Email:** [materialcompliance@ansmann.de](mailto:materialcompliance@ansmann.de)

**Phone:** +49629442040

**Address:**

Industriestr. 10  
97959 Assamstadt  
Germany